



end mill expert




• Roughing series - 4 flutes - TiCN

• 4刀粗銑刀

Micro Grain High Speed steel

- 含8%的鈷鋼
- 30° 螺旋角
- 應用所有材料
- 適用外型/切槽

- Co Content 8%
- Helix degree: 30°
- Apply to all material
- Apply to surface milling/slotting

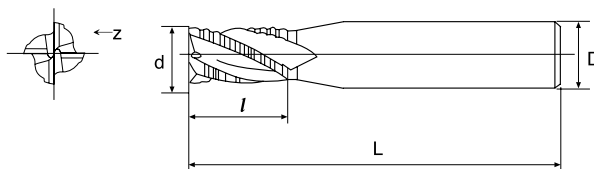

| NO | MODE | Diameter | Flute Length | Full Length | Shank Diameter | Flutes |
|----|--------------------|----------|--------------|-------------|----------------|--------|
| 頂次 | 型號 | d 刃徑 | l 刃長 | L 全長 | D 柄徑 | Z 刃數 |
| 1 | HSSXTA0604 T | 6 | 15 | 60 | 8 | 4 |
| 2 | HSSXTA0704 T | 7 | 20 | 65 | 10 | 4 |
| 3 | HSSXTA0804 T | 8 | 20 | 65 | 10 | 4 |
| 4 | HSSXTA0904 T | 9 | 25 | 75 | 12 | 4 |
| 5 | HSSXTA1004 T | 10 | 25 | 75 | 12 | 4 |
| 6 | HSSXTA1104 T | 11 | 30 | 80 | 12 | 4 |
| 7 | HSSXTA1204 T | 12 | 30 | 80 | 12 | 4 |
| 8 | HSSXTA1304 T | 13 | 35 | 90 | 16 | 4 |
| 9 | HSSXTA1404 T | 14 | 35 | 90 | 16 | 4 |
| 10 | HSSXTA1504 T | 15 | 40 | 90 | 16 | 4 |
| 11 | HSSXTA1604 T | 16 | 40 | 95 | 16 | 4 |
| 12 | HSSXTA1804 T | 18 | 40 | 105 | 20 | 4 |
| 13 | HSSXTA2004 T | 20 | 45 | 110 | 20 | 4 |
| 14 | HSSXTA2205 T | 22 | 45 | 110 | 20 | 5 |
| 15 | HSSXTA2505 T | 25 | 50 | 120 | 25 | 5 |
| 16 | HSSXTA2806 T | 28 | 55 | 125 | 25 | 6 |
| 17 | HSSXTA3006 T | 30 | 55 | 125 | 25 | 6 |
| 18 | HSSXTA3206 T | 32 | 60 | 145 | 32 | 6 |
| 19 | HSSXTA3606 T | 36 | 60 | 160 | 32 | 6 |
| 20 | HSSXTA4006 T (D32) | 40 | 65 | 160 | 32 | 6 |
| 21 | HSSXTA4006 T (D40) | 40 | 65 | 160 | 32 | 6 |
| 22 | HSSXTA4506 T | 45 | 75 | 177 | 50 | 6 |

